

epe t-piece mod. vmt16...

EPE T-PIECE MOD. VMT16...



FEATURES

T-piece in EPE, insulating material smooth on the inside and outside with low pressure drop values, lightweight and easy to cut, elastic and soft to the touch, does not rust, easy to install and clean.

Construction material: - EPE expanded polyethylene with a density of 30 kg/m³, grey color

Thermal conductivity coefficient: 0.041 W/m.K (EN 12667)

Operating temperature: Min. -30°C ; Max +60°C

Reaction to fire: CLASS B - s2, d0 (EN13501-1, 2018)


Airtightness class: D (EN12237) = ATC 2 (EN16798)

Installation locations: wall-mounted; ceiling-mounted; false ceiling. For ventilation and air conditioning air transport.

Assembly system: connects to EPE pipes via sleeves and to collars using clamps (see below).

Connection accessories: EPE pipe-EPE bend connection sleeves of appropriate diameter (mod. VMRA16...); collar-EPE bend connection clamps of appropriate diameter (mod. VMCF16...).

DIMENSIONS

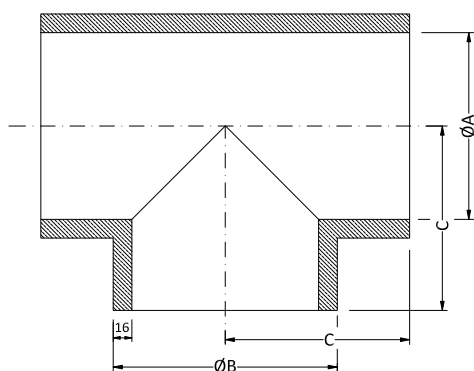

Code	Item name	ØA (mm)	ØB (mm)	C (mm)	Length (mm)	coefficient Zeta	EPE thickness (mm)
VMT16125	EPE T-piece int.Ø 125 - ext.Ø 157	125	157	138	276	0,98	16
VMT16160	EPE T-piece int.Ø 160 - ext.Ø 192	160	192	158	316	0,89	16

REV 08/2026