

# 30° epe elbow mod. vmc3016180

## 30° EPE ELBOW MOD. VMC3016180



## FEATURES

30° EPE elbow, insulating material smooth on the inside and outside with low pressure drop values, lightweight and easy to cut, elastic and soft to the touch, does not rust, easy to install and clean.

**Construction material:** - EPE expanded polyethylene with a density of 30 kg/m<sup>3</sup>, grey color

**Thermal conductivity coefficient:** 0.041 W/m.K (EN 12667)

**Operating temperature:** Min. -30°C ; Max +60°C

**Reaction to fire:** CLASS B - s2, d0 (EN13501-1, 2018)


**Airtightness class:** D (EN12237) = ATC 2 (EN16798)

Installation locations: wall-mounted; ceiling-mounted; false ceiling. For ventilation and air conditioning air transport.

**Assembly system:** connects to EPE pipes via sleeves and to collars using clamps (see below).

**Connection accessories:** EPE pipe-EPE elbow connection sleeve (mod. VMRA16180); collar-EPE elbow connection clamp (mod. VMCF16180).

## DIMENSIONS

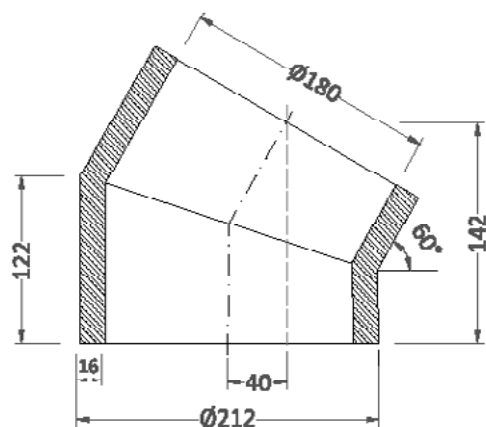

## GRAPH

